

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau(43) International Publication Date  
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number  
WO 2004/034313 A1(51) International Patent Classification?: G06K 9/74,  
G07D 7/00, B42D 15/10, B44F 1/00Vic 3174 (AU). SWIEGERS, Gerhard [AU/AU]; 53  
Petronella Avenue, Wheeler's Hill, VIC 3150 (AU).(21) International Application Number:  
PCT/AU2003/001331(74) Agent: GRIFFITH HACK; Level 3, 509 St Kilda Road,  
Melbourne, VIC 3004 (AU).

(22) International Filing Date: 9 October 2003 (09.10.2003)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:  
2002951963 9 October 2002 (09.10.2002) AU(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.(71) Applicant (*for all designated States except US*): COM-  
MONWEALTH SCIENTIFIC AND INDUSTRIAL  
RESEARCH ORGANISATION [AU/AU]; Limestone  
Avenue, Campbell, ACT 2612 (AU).(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): MCCARTHY,  
Lawrence [AU/AU]; 13 Wren Drive, Noble Park North,Published:  
— with international search report

[Continued on next page]

(54) Title: SECURITY DEVICE

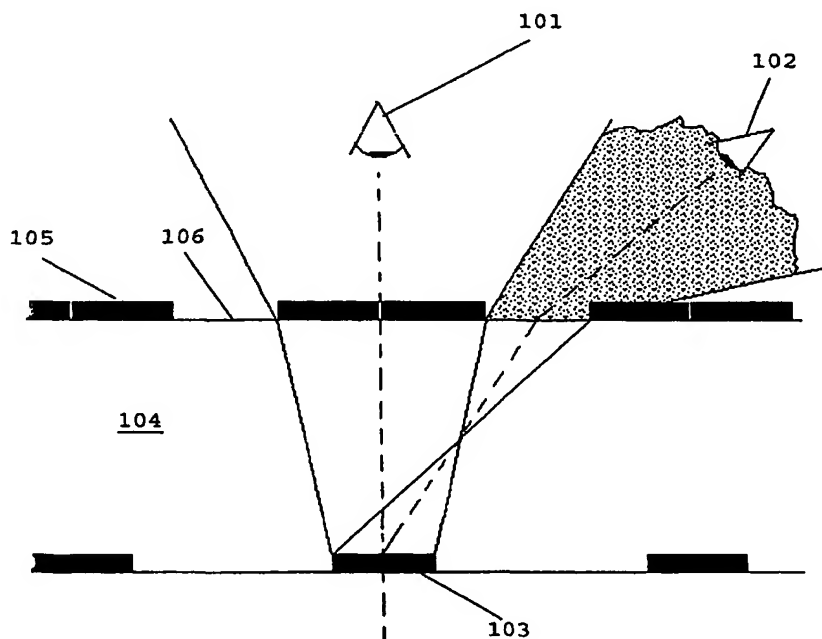

(57) Abstract: The present invention relates to a security device or a security apparatus comprising one or more primary images (103) encoded within a secondary image in such a manner that the primary images can only be observed by an observer (102) when the secondary image, a decoding mask (105) and the observer are in a predetermined alignment. Embodiments of the invention have application in the provision of security devices which can be used to verify the legitimacy of a document, instrument or the like.

BEST AVAILABLE COPY

WO 2004/034313 A1

**WO 2004/034313 A1**



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

- 1 -

SECURITY DEVICEField of the Invention

5           The present invention relates to a security device or a security apparatus comprising one or more primary images encoded within a secondary image in such a manner that the primary images can only be observed by an observer when the secondary image, a decoding mask and the  
10 observer are in a predetermined alignment. Embodiments of the invention have application in the provision of security devices which can be used to verify the legitimacy of a document, instrument or the like.

15 Background to the Invention

          In order to prevent unauthorised duplication or alteration of documents such as banknotes, credit cards and the like, security devices are often incorporated as a  
20 deterrent to copyists. The security devices are either designed to deter copying or to make copying apparent once copying occurs. Despite the wide variety of techniques which are available, there is always a need for further techniques which can be applied to provide a security  
25 device.

Summary of the Invention

          In a first aspect of the invention, there is  
30 provided a security device comprising:  
          a secondary image comprising one or more encoded primary images, each of said one or more encoded primary images comprising a plurality of regularly sized and spaced apart primary image elements; and  
35           a decoding mask separated from the secondary image, the decoding mask having a plurality of regularly spaced apart transparent viewing portions separated by

- 2 -

masking portions, the size and spacing of the viewing portions being such that when said viewing portions of the mask, said secondary image and an observer are located in or more predetermined alignments for each said one or more encoded primary images, the primary image elements from the secondary image may be observed through the viewing portions, whereby the corresponding primary image may be observed along a line of sight corresponding to said predetermined alignment.

10

In some embodiments, the secondary image comprises a plurality of encoded primary images, the primary images being arranged such that each of the primary images may be observed in different predetermined alignments of the mask, the secondary image, and the observer.

15

In some embodiments, each encoded primary image is arranged in at least partial overlapping relationship with at least one other primary image with at least one primary image element located within a boundary of the primary image.

20

In one embodiment, the encoded primary images are related and located relative to one another so as to produce an animation effect as successive primary images are observed.

25

In some embodiments, the colours of at least one of the decoding mask and/or at least one of said one or more primary images are chosen to enhance the effect of at least one of said one or more primary images coming into alignment.

30

In one embodiment, the predetermined alignment is chosen such that each of the one or more primary images

35

- 3 -

cannot be observed by an observer observing the security device along a line of sight substantially perpendicular to the plane in which the decoding mask is located.

5           In one embodiment, there is only one encoded primary image and the decoding mask is positioned relative to said secondary image such that said primary image can only be observed by an observer observing the security device along a line of sight substantially perpendicular to the plane in which the decoding mask is located.

In another aspect, the invention provides a security apparatus comprising:

15           a security device adapted to be provided on or as part of an item to be secured, the security device comprising a secondary image comprising one or more encoded primary images, each of said one or more encoded primary images comprising a plurality of regularly sized and spaced apart primary image elements; and

20           a decoding mask having a plurality of regularly spaced apart viewing portions separated by masking portions, the size and spacing of the viewing portions being such that at a predetermined separation between the mask and the secondary image and when said viewing portions of the mask, said secondary image and an observer are in one or more predetermined alignments for each said one or more encoded primary images, the primary image elements of the aligned primary image of the secondary image may be observed through the viewing portions, whereby the corresponding primary image may be observed along a line of sight corresponding to said predetermined alignment.

35           In one embodiment, the decoding mask and secondary image are provided at spaced apart locations on the same piece of material in such a manner that the material can be folded so as to locate the decoding mask

- 4 -

over the secondary image and move the decoding mask relative to the secondary image to view each of the primary images.

5                   In a further aspect the invention provides a method of securing an item comprising:

                  providing a security device adapted to be provided on or as part of an item to be secured, the security device comprising a secondary image comprising  
10   one or more encoded primary images, each of said one or more encoded primary images comprising a plurality of regularly sized and spaced apart primary image elements;  
                  providing a decoding mask having a plurality of regularly spaced apart viewing portions separated by  
15   masking portions, the size and spacing of the viewing portions being such that at a predetermined separation between the mask and the secondary image and when said viewing portions of the mask, said secondary image and an observer are in one or more predetermined alignments for  
20   each said one or more encoded primary images, the primary image elements of the aligned primary image of the secondary image may be observed through the viewing portions, whereby the corresponding primary image may be observed along a line of sight corresponding to said  
25   predetermined alignment.

#### Brief Description of the Drawings

                  A preferred embodiment of the invention will now  
30   be described in relation to the accompanying drawings in which:

                  Figure 1 shows a secondary image of a first example;

                  Figure 2 shows a mask suitable for use with both  
35   the first and second example;

                  Figure 3 shows how the mask of Figure 2 is used to reveal one of the primary images in Figure 1;

- 5 -

Figure 4 shows four original images which can be used as the basis of primary images;

Figure 5 shows the primary images produced from the images from Figure 4;

5        Figure 6 shows the primary images of Figure 5 combined into a secondary image;

Figure 7 shows the secondary image of Figure 6 wherein the white spaces are filled with random or pseudo-random elements;

10       Figure 8 shows an example of an alternative mask;

Figure 9 shows the mathematical relationships between a mask and a secondary image affixed to opposite sides of a transparent plastic film.

15       Figure 10 shows an original image containing information of interest for the fourth and fifth embodiments;

Figure 11 shows the encoded primary image produced from the image in Figure 10;

20       Figure 12 shows the mask affixed in correct overlay with the secondary image in accordance with the fourth embodiment;

Figure 13 shows the resulting image observed by a viewer positioned at an angle perpendicular to the surface of the mask and secondary image;

25       Figure 14 shows the image observed by a viewer positioned at another angle, not perpendicular to the surface of the device;

Figure 15 shows the mask when affixed in correct overlay in accordance with the fifth embodiment;

30       Figure 16 illustrates how an animated effect may be achieved in a security device or apparatus in accordance with any one of the first to third embodiments; and

35       Figure 17 shows a security device made in accordance with the fourth embodiment.

#### Description of the Preferred Embodiments

- 6 -

The preferred embodiments provide security devices and security apparatus wherein one or more primary images are encoded within a secondary image in such a manner that the primary images can only be observed by an observer when the secondary image, an appropriate decoding mask and the observer are in a predetermined alignment.

In the security devices and security apparatus of the preferred embodiments the primary image within the secondary image is typically unintelligible so that it is not readily apparent that the one or more primary images are contained within the secondary image. When the decoding mask and the observer are correctly oriented relative to an encoded primary image, a primary image can be observed by an observer. In embodiments where there is more than one primary image, by altering the relative position of the observer and/or the mask and/or the secondary image, each of the primary images can be viewed.

Herein, the term "secondary image" does not imply that the secondary image contains an observable image of, for example an object, rather, the term "secondary image" is used to refer to a set of image elements which contains within its borders at least the primary image elements of each of the one or more encoded primary images. That is, depending on the embodiment the secondary image may also contain additional image element or itself be contained within another image. The term secondary image is used to refer to the image containing the encoded primary images irrespective of whether the secondary image has been subject to further modification after the encoded primary images have been combined as may occur in some embodiments.

Depending on the embodiment, all parts of the secondary image need not necessarily be located in the

- 7 -

same plane. Thus, it is possible to form a device or apparatus where there are multiple layers for the second image each having different separations from the decoding mask. For example, in a secondary image comprising two encoded primary images one encoded primary image may be located in one plane and the other may be located in another plane. Similarly, portions of one primary image may be located in multiple planes.

Similarly, the term "primary image" is used to refer to whatever is observed by an observer when the decoding mask, the encoded primary image and the observer are in alignment, irrespective of whether this is an image of an object.

Accordingly, it will also be appreciated that the term "encoded primary image" is used to refer to the set of image elements which will allow the primary image to be observed.

The "image elements" are typically pixels (i.e. the smallest available printing element). However, each "image element" may consist of a group of pixels - e.g. a 2 x 2 array of pixels.

The term "security device" is used to refer to embodiments of the invention where the decoding mask is fixed relative to the secondary image. Such devices can be formed for example, by forming a laminate of layers of material on which each of the decoding mask and secondary image are printed, by printing them on opposite sides of a piece of transparent material or, by printing them at different levels within a piece of transparent material. Accordingly, the primary image hidden within the secondary image can be viewed by the observer moving or by tilting the security device relative to the observer.

- 8 -

In contrast, the term "security apparatus" is used to refer to embodiments where the decoding mask can be physically moved relative to the secondary image. In this case, the relative movement of the two surfaces relative to one another at a predetermined separation will allow each of the one or more primary images to be viewed. The components of such security apparatus need not necessarily be physically separate to one another as will be described in relation to the third embodiment.

#### First Preferred Embodiment

In each of the variants of the first, second and third preferred embodiments, there are a plurality of primary images combined within the secondary image. Further, each image element is made of a small size. It is preferred that the area of each image element is in the range  $1 \times 10^{-12} \text{m}^2$  to  $2.5 \times 10^{-9} \text{m}^2$  although image elements of area up to  $4 \times 10^{-8} \text{m}^2$  may be acceptable in some embodiments. Further, if printing techniques allow, it would be desirable to print at sizes down to  $1 \times 10^{-14} \text{m}^2$ . This corresponds for square image elements where the sides of each square have a length in the range of  $0.1 \mu\text{m}$  to  $200 \mu\text{m}$ .

In any physical embodiment, a clear picture of one of the primary images can only be perceived by the observer when all, or most of the viewing portions of the mask overlap perfectly with all or most of the image elements belonging to one of the primary images within the secondary image. If the physical size of the viewing portions in the decoding mask differ from the physical size of the image elements in the secondary image either in reality or in perspective (if a space is present between the mask and the secondary image), it becomes impossible to correctly align all or most of the viewing portions of the mask with all or most of the primary image

- 9 -

elements belonging to one of the encoded primary images in the secondary image. The observer cannot then perceive any of the primary images clearly. Successful production of the effect therefore depends on correctly and precisely matching the physical dimensions of the viewing portions in the mask with the image elements in the secondary image.

When the viewing portions on the mask and the image elements in the secondary image are very small, that is within the range of  $0.1\mu\text{m}$  to  $200\mu\text{m}$ , the effect of mismatches in their dimensions is greatly exaggerated. This is because even a relatively small overall secondary image, say of 5 cm x 5 cm dimensions, requires many viewing portions in the mask and image elements in the secondary image. Even small mismatches in their dimensions therefore cause substantial displacement errors to occur in traversing the large number of image elements present.

20

In a security device or security apparatus containing dimensionally identical mask viewing portions and secondary image elements, the effect of altering the relative positions of at least two of the mask, the secondary image and the observer is to create a sequential change in the primary images perceived by the observer. The rate of this sequential change is characteristic of, and dependent upon the dimensions of the mask viewing portions and secondary image elements, all other features remaining invariant. Thus, changes in these dimensions also increase or decrease the speed with which the primary images are perceived to sequentially change by the observer. Variations in the speed of this sequential change can be extremely evident to the observer. For example, where an animation effect involving the successive observation of closely related primary images is employed, the speed of the animation will be a

35

- 10 -

distinctive characteristic of the system. Changes in the speed of animation can therefore readily distinguish an original from a copy, even if the images employed in the animation are identical.

5

In embodiments such as the first embodiment where the mask is provided on one side of a sheet of transparent material with the secondary image affixed (e.g. by printing) to the other side of the transparent material, the rate of the sequential change of the primary images perceived by the observer during rotation of the security device is also dependent on the thickness of the sheet and its refractive index.

10

Thus, the primary images can be correctly and characteristically observed only when the secondary image and the mask are constructed to exact, miniature, design and dimensions.

15

As all known reproduction and copying techniques produce errors, to lesser or greater extents, in the dimensions and resolution of the copied portions, these limitations offer a means to deter counterfeiting or identify where it has taken place.

20

In particular, these small sizes offer substantial protection against "casual counterfeiting" using color photocopiers, computer scanners and the like. With the small dimensions involved, the errors introduced by using this machinery will introduce errors in the manner of which one image transforms to the next image which will become noticeable as staccato or interrupted changes. Furthermore, it is possible to select the resolution using a printing technique to be different to that conventionally used by photocopiers or digital image acquirers such as scanners and digital cameras. For example, the picture resolution of such devices is

25

30

35

- 11 -

typically an even number - (e.g. 240 dpi) whereas it is possible to choose an unusual picture resolution - (e.g. 257 dpi) which makes the image extremely difficult to capture.

5

In the first preferred embodiment, a security device is provided having a decoding mask which has a plurality of regularly spaced apart viewing portions. To form a secondary image, a plurality of encoded primary  
10 images, each consisting of a plurality of primary image elements having corresponding spacing to the viewing portions are also provided. The relative size of the viewing portions and primary image elements is chosen depending on the separation of viewing portions and image  
15 elements. However, they may be chosen to be the same side. The encoded primary images are then combined to form a secondary image. The encoded primary images are combined in such a manner that the image elements of the primary images do not overlap. The viewing portions of  
20 the mask are separated by masking portions which mask the image elements of the other encoded primary images when the viewing portions are located over the image elements of one of the encoded primary images whereby the corresponding primary image can be observed.

25

To form the security device, the mask is applied to one side of a piece of transparent material with a secondary image applied to the other side. By moving the piece of transparent material relevant to the observer,  
30 the different primary images can be viewed. This is particularly useful where it is desired to have the secondary image produces an animated effect - i.e. it is possible to incorporate a number of related original images into the secondary image so that as they are  
35 successively viewed the image appears to change.

In this embodiment, the primary image which is

- 12 -

observed by the observer when the primary image elements, the viewing portions and the observer are in alignment is recognisable by the observer as a version of the original image as the masking portions of the decoding mask decode the encoded primary image supplement the information carried by the encoded primary image to enable the primary image to be observed.

The secondary image and the decoding mask can be formed in a number of different ways. For example, a secondary image may be formed by interleaving and overlaying  $n$  primary images, where  $n$  is an integer ( $n \geq 2$ ). Each of the primary images to be included in the secondary image is formed by taking an original image and digitising it to produce a digitised original image consisting of a plurality of pixels. The pixilated original images are then modified in order to produce the encoded primary image so as to allow them to be combined to create a secondary image.

20

Essentially, each of the original images is modified by removing sufficient pixels to accommodate pixels of each of the other primary images in areas where the primary images overlap one another. For example, an original image can be modified by laying the chosen mask over the top of the original and keeping only the pixels which fall within the viewing portions of the mask. The remaining pixels are the "primary image elements" of the encoded primary images.

30

Once the individual encoded primary images have been obtained they can be combined into a secondary image by offsetting them relative to one another such that they do not overlap.

35

A further alternative technique of interleaving and overlaying may also be used to form the secondary

- 13 -

image. In this technique, the primary images are combined into one image prior to the application of an interleaving algorithm. For example, if one wishes to interleave primary images, each containing a different letter A, B, C, or D, then an original image consisting of a repeating array of these different symbols - the letters A, B, C and D, or the like is created. The original image is then reconstituted into a  $p \times q$  matrix of pixels where  $p$  and  $q$  are integers using methods known to the art. An algorithm is then applied to the image to form the secondary image. Such an algorithm can include the mathematical scaling down and interleaving of a matrix to a non-integral fraction of its original form, e.g.  $.101p \times .101q$ . In doing so a new pixel matrix is created for in which the letter arrays employed in the primary images have now become mathematically interleaved and virtually unrecognisable. Pixels or groups of pixels in this image may appear to have different grey-or intermediate colour tones as a result of the interleaving process.

A secondary image containing pixels, none of which are blank and all of which originate from an individual pixel of only one of the primary images, is thus obtained.

A mask is created by converting all of the blank pixels in one of the primary images to black pixels; the remaining pixels are converted to white. The white pixels are subsequently printed as transparent pixels in order to provide viewing portions.

A further alternative technique of interleaving and overlaying may also be used to form the secondary image. Original images consisting of an array of multiple different symbols - e.g. the letters A, B or C or the like are created. Each of the original images is reconstituted into a  $p \times q$  matrix of pixels where  $p$  and  $q$  are integers

- 14 -

using methods known to the art. The physical size of each of the pixels, in each of the original images is identical to those of the other original images. An algorithm is then applied to each original image to form the primary  
5 image. Such an algorithm can include the mathematical scaling down of a matrix to a non-integral fraction of its original form, e.g. .101p x .101q. In doing so a new pixel matrix is created for each original image in which the letter arrays employed in the primary images have now  
10 become mathematically interleaved and virtually unrecognisable. Pixels or groups of pixels in these images may appear to have different grey-or intermediate colour tones as a result of the interleaving process. The primary images which have thus been created are now  
15 overlayed side by side with the other primary images in a repeating fashion to create the secondary image.

A mask is created by converting all of the blank pixels in one of the primary images to black pixels; the  
20 remaining pixels are converted to white and printed as transparent pixels to thereby form the viewing portions.

While a range of techniques can be used to interleave and overlay images to form the secondary image,  
25 in all cases the techniques must be contrived so as to allow a mask having a plurality of viewing portions to render exclusively one of the primary images observable in at predetermined alignments of the mask, the secondary image and the observer.

30 The original images which can be used to form primary images or the primary images themselves can be graphical depictions of text, colours, portraits or images of people, animals, maps, geographical features, coats of  
35 arms, or other suitable images. The primary image may be repeated versions of a single image. Further, the primary images may be created directly in a form suitable for

- 15 -

combining into the secondary image.

5           The secondary image may be either readily  
recognisable or unintelligible depending on the desired  
application. Further, where it is desired to render the  
composite image unintelligible random or pseudo-random  
elements may be introduced into the secondary image to  
render it less intelligible.

10           A number of different techniques including  
printing, engraving, embossing, moulding, digital and  
photographic techniques can be used to produce the  
secondary images and the decoding mask. Such techniques  
will be well known to persons skilled in the art.

15           Colours may be used in either the secondary image  
or the mask in order to achieve colour-shifting effects in  
which the movement of the mask over the composite image  
produces characteristic sudden or gradual changes in  
20   colour.

          By combining highly contrasted primary images  
into the secondary image, flash illumination of multiple  
images may be achieved. For example, primary images of  
25   brightly highlighted messages or images are combined with  
poorly highlighted primary images in the composite image.  
When a mask is moved relative to the face of the secondary  
image, the brightly highlighted images are observed to  
flash sequentially and noticeably.

30           Masks and images of different colours can be used  
to obtain a wide variety of colour primary images.

          Some degree of coloured transparency can also be  
35   used. With transparency a greater range of colours can  
occur as light passes through the coloured sections of the  
encoded primary images and coloured sections of the mask.

- 16 -

By combining opaque and transparent printing a greater resistance to counterfeiting could be achieved.

5           Also other variations can be applied or used in combination such as multiple colours in the image and mask. The colour variation can be applied both horizontally and vertically to the decoding mask and image so that different colour shifting can occur with the  
10 device is tilted side to side or top to bottom or somewhere in-between.

Different masks may be used in different applications. For example, for six primary images, where  
15 the image elements are pixels, one pixel in every group of 2 x 3 pixels should be a viewing portion. Further, it is not necessary for the invention to be embodied by a rectangular array either - for example, the viewing portions and image elements could be hexagonal.

20           This embodiment can be used to increase the security in anti-counterfeiting capabilities of items such as tickets, passports, licences, currency, and postal media. Other useful examples of items may include credit  
25 cards, photo identification cards, tickets, negotiable instruments, bank cheques, traveller's cheques, labels for clothing, drugs, alcohol, video tapes or the like, birth certificates, vehicle registration cards, land deed titles, visas, and consumable products.

30           Second Preferred Embodiment

In the second embodiment, the invention is provided as a distributed apparatus where the decoding  
35 mask is provided separate to the secondary image.

Typically, the secondary image would be

- 17 -

incorporated within a document, such as a passport and the decoding mask would be provided to people such as immigration officers who are required to check the authenticity of the document. The decoding mask would typically be presented on one side of a piece of transparent material corresponding to the predetermined separation distance at which the primary images will be observable. The security image can be hidden within the primary document so that a counterfeiter is not necessarily aware of its presence. Without having an authorised decoding mask, the counterfeiter will not be able to determine that they have produced an appropriate screen.

As with the first embodiment, the primary images can be chosen if desired, to produce an animation or flash illumination effect when the screen is moved relative to the observer and the secondary image. Typically, by passing the screen over the document including the security device.

#### Third Preferred Embodiment

In a third embodiment otherwise constructed in accordance with the second and first embodiment, security apparatus is provided in which the mask and the secondary image to be carried by the same piece of material in such a manner that the mask can be applied over the secondary image by folding the material. For example, the secondary image could be located at one end of a bank note and the mask located at another end in such a manner that when they are folded over they reveal the secondary image to thereby provide verification of the validity of the banknote.

#### Fourth Preferred Embodiment

- 18 -

The fourth embodiment provides a security device where one or more primary images are combined into a secondary image, and the decoding mask is fixed relative to the secondary image in such a way that the primary  
5 image containing the information of interest is not visible when the observer is positioned substantially perpendicularly above the surface of the mask / secondary image. That is to view the primary image or image encoded within the secondary image which contains the information  
10 of interest, the observer needs to be positioned at an angle to the perpendicular.

Each of the one or more encoded primary images to be included in the secondary image is formed by taking an  
15 original image and digitising it to produce a digitised original image consisting of a plurality of pixels. The pixilated original images are then modified in order to allow them to be combined to create a secondary image. Persons skilled in the art will appreciate that a  
20 digitised image may also be used as an original image. In this embodiment, as explained in more detail below it is only necessary for a single primary image to be incorporated within the secondary image in order to obtain anti-counterfeiting benefits.

25 As with the other embodiments, the original images which can be used to form primary images which can be graphical depictions of text, colours, portraits or images of people, animals, maps, geographical features,  
30 coats of arms, or other suitable images. Further, the primary images may be created directly in a form suitable for combining into the secondary image.

Accordingly, an appropriate technique for  
35 producing a single encoded primary image is to modify an original image by laying the decoding mask over the top and keeping only the pixels which fall within the viewing

- 19 -

portions of the mask - i.e. the remaining pixels are set to be blank/transparent.

5        However, in a variant on the embodiment, two or more encoded primary images may be incorporated within the secondary image using any of the techniques outlined in relation to the first embodiment.

10        As indicated above, the mask and the secondary image are affixed in a suitably separated overlay to opposite sides of a separator in the form of a piece of transparent material - e.g. by printing them on either side of the transparent material. In a preferred variant of this embodiment, an additional blocking mask is located  
15        on the opposite side of the secondary image by laminating a piece of material having the blocking mask thereon to the material.

20        In another preferred variant, the mask (or both masks) and the secondary image are printed within the transparent material at different depths in order to avoid tampering.

25        The separated overlay is chosen so that the primary image containing the information of interest is not observable when the observer is positioned perpendicularly or near-perpendicularly above the surface of the security device. To view the primary image containing the information of interest, the observer must  
30        be positioned at an angle to the perpendicular. This prevents the primary image from being acquired by laying the security device flat on an image acquirer such as a photocopier.

35        The fourth embodiment will now be described further in relation to Figure 10. Figure 10 shows an original image containing information of interest. This

- 20 -

original image consists of square image elements in the form of pixels. The square elements do not have to be the same size as the mask elements however; for worthwhile interleaving to occur the image must be larger than the elements of the mask.

The original image is manipulated by using an algorithm to make blank (transparent) five out of every six pixels to form the encoded primary image shown in Figure 11. As can be seen, for each pixel left undisturbed, five pixels have been made blank in the right-hand direction. In this example of the fourth embodiment, this single primary image provides the secondary image.

The decoding mask consisting of a repeating pattern of five opaque lines and one transparent line each one image element within is now overlaid upon the secondary image, with a suitable separation as illustrated in Figure 12. For example, the secondary image may be printed on one side of a transparent portion of a credit card, with the mask printed in correct register on the other side.

Figure 12 schematically illustrates the effect for a first observer 101 positioned approximately perpendicularly above the overlaid secondary image and mask and a second observer 102 at a position where the primary image can be observed. As can be seen, the primary image information of interest is not visible to the first observer 101, but is visible to the second observer 102. Thus, attempting to photocopy the device will yield only an image of the mask. Figure 13 illustrates the view seen by the first observer, or upon photocopying, where only a section 113 of the decoding mask is shown in order to illustrate the position of the primary image 114.

- 21 -

Figure 14 illustrates, in partial cut-away form, the view seen by a second observer 103 positioned at an angle to the perpendicularly above the secondary image and mask.

5 As can be seen, the information of interest is visible in those areas where the mask 120 overlies the encoded primary image 121.

If:

10  $w$  = the width of the image elements 103

$T$  = the thickness of the spacing media 104

$B$  = the combined width of the opaque mask elements 105

$G$  = the width of the transparent sections of the mask 106

$R_i$  = the refractive index of the spacing media

15  $V_a$  = the angle over which some of the image is visible

$H_a$  = the angle over which none of the image is visible

$L_a$  = the angle over which a secondary non-viewing zone occurs

20 The hidden angle, the viewing angle and a second hidden angle are defined by the following equation.

$$H_a = 2 \operatorname{asin}(R_i \sin(\operatorname{atan}((B-w)/2T)))$$

25  $V_a = \operatorname{asin}(R_i \sin(\operatorname{atan}(G/T + (B+w)/2T))) - H_a/2$

$$L_a = 90^\circ - H_a/2 - V_a$$

Notice:

30

(1) If  $(H_a/2 + V_a) > 90^\circ$  then  $L_a$  does not exist.

(2) If both  $V_a$  and  $H_a$  are small then a number of viewing zones are possible.

35  $H_a$  becomes smaller as  $B$  becomes smaller and  $w$  and  $T$  become larger.

$V_a$  becomes smaller as  $B, w$  and  $G$  become smaller

- 22 -

and T becomes larger.

(3) If  $(H_a/2 + V_a) = 90^\circ$  then:  $\sin(\arctan(G/T + (B+w)/2T)) = 1/R_i$

5

Therefore if the spacing media has the same  $R_i$  as the surrounding media ( $1/R_i=1$ ) then a secondary hidden zone must exist (and hence a possible additional viewing zone) unless T is reduced to zero. If the spacing media has a higher  $R_i$  than the surrounding media ( $1/R_i < 1$  the typical case) then the secondary hidden zone can be reduced to zero while  $T > 0$ .

10

At  $L_a = 0$ :

15

$$T = (G + (B+w)/2) / \tan(\arcsin(1/R_i))$$

Typical polymers suitable for use in embodiments of this invention have a  $R_i \sim 1.5$  at  $R_i=1.5$  therefore  $\tan(\arcsin(1/R_i)) \sim 0.89$ .

20

In a typical application, the security device is designed with the image and mask to be printed on each side of a plastic card including a transparent portion, the size of a typical credit card (85 mm x 53 mm). The security device was to be used at a normal viewing distance when held in the hand. This is typically a distance of approximately 250-400 mm. At this distance 20 point characters are easily read. About 20 characters of this size can be pseudo-randomly distributed over a square 32 mm x 32 mm.

25

30

For such an application, the mask has opaque lines 533 micron wide and transparent gaps 107 microns wide (5:1 ratio). These images are then used to produce the encoded image as shown in Figure 11.

35

- 23 -

Applying the equations given above using the values:

B = 533 micron

5 G and w = 107 micron

T = 600 micron (Typical card thickness)

Assume the card material is polyethyleneterephthalate (PET) with  $R_i$  of 1.57

10 gives:

Hidden angle  $H_a = 63.4^\circ$

Visible angle  $V_a = 33.9^\circ$

Secondary Hidden angle  $L_a = 24^\circ$

15 Two viewing directions are possible; right and left of perpendicular.

Additionally, the regular line arrayed mask shown can be constructed so as to produce Moire patterns when  
20 photographically copied.

If the security device is incorporated in a credit card, the authenticity of the credit card can be verified by requesting the bearer to provide some of the  
25 information of interest which has been placed on the credit card. For example, the bearer may be asked "What is the number in the bottom left of your card?" If the bearer answers "six", this conforms to the expected number seen in Figure 11 and provides evidence that the original  
30 card is present. Numerous questions of this type, involving the random selection of information of interest can be used to establish the presence and authenticity of the card with increasing certainty. For example, the card can be placed within a frame and a particular portion of  
35 the security device identified as containing the code number of interest by its position relative to the frame.

- 24 -

In a variation of this embodiment two or more primary images are incorporated within the secondary image and the mask is fixed such that neither of the image can be viewed as the perpendicular or near-perpendicular. By moving the piece of transparent material relative to the observer, the different primary images can be viewed.

As most reproduction and copying techniques rely on capturing an image visible from one point in space, the incorporation of multiple images, viewable only from different points in space render devices of the kind described in this application resistant to reproduction. Additionally, successful reproduction or copying of the present invention also requires the use of a transparent sheet of the correct thickness and refractive index, along with a correctly patterned mask or masks and a secondary image which have been reproduced in exact dimensional accuracy. These limitations further deter successful counterfeiting.

Techniques may be used to disguise the presence of the primary images in the secondary image. For example, extra image elements may be added to the secondary image to disguise the primary images. For example, where the image elements are coloured pixels, randomly coloured pixels may be added to the secondary image.

Finally, the device may employ coloured secondary images and / or masks and be so constructed as to interfere with widely available copying methods by generating, for example, Moire patterns when photographed with a digital camera or video camera.

#### Fifth Preferred Embodiment

The fifth embodiment of the present invention is

- 25 -

a variant on the fourth embodiment where only a single encoded primary image containing information of interest is included in the secondary image. The original image and encoded primary image containing information of interest shown in Figures 10 and 11 respectively are suitable for use in this embodiment.

The key difference to the fourth embodiment is that the decoding mask and secondary image are overlaid and separated so that the primary image of interest may only be observed when the observer is in a substantially perpendicular position relative to the plane of the security device.

Referring to Figure 15, it is clear that observer 130 can see the information of interest, but observer 131 cannot. If:

$w$  = the width of the image elements 133

$T$  = the thickness of the spacing media 134

$B$  = the width of the opaque mask elements 135

$G$  = the width of the transparent sections 136 of the mask

$R_i$  = the refractive index of the spacing media

$V_a$  = the angle over which some of the image is visible

$H_a$  = the angle over which none of the image is visible

$L_a$  = the angle over which a secondary viewing zone may occur

$$V_a = 2 \operatorname{asin}(R_i \sin(\operatorname{atan}((G+w)/2T)))$$

$$H_a = \operatorname{asin}(R_i \sin(\operatorname{atan}(B/T + (G-w)/2T))) - V_a/2$$

$$L_a = 90^\circ - V_a/2 - H_a$$

Notice:

(1) If  $(V_a/2 + H_a) > 90^\circ$  then  $L_a$  does not exist.

- 26 -

In practice if  $I_a$  is small the secondary image will be invisible because of surface reflection.

5 (2) If both  $V_a$  and  $H_a$  are small then a number of viewing zones are possible.

$V_a$  becomes smaller as  $G$  and  $w$  become smaller and  $T$  becomes larger.

$H_a$  becomes smaller as  $B$  and  $G$  become smaller and  $w$  and  $T$  become larger.

10

(3) If  $(V_a/2 + H_a) = 90^\circ$  then:  
 $\sin(\arctan(B/T + (G-w)/2T)) = 1/R_i$

15 Therefore if the spacing media has the same  $R_i$  as the surrounding media ( $1/R_i=1$ ) then the only way of preventing a secondary viewing zone is to reduce  $T$  to zero.

20 For a security device having the same dimensions described in relation to the first embodiment - i.e.

$B = 533$  micron  
 $G$  and  $w = 107$  micron  
 $T = 600$  micron  
25  $R_1 = .57$

Visible angle,  $V_a = 32^\circ$   
Hidden angle,  $H_a =$  Indeterminate therefore greater than  $74^\circ$  ( $90 - 32/2$ )

30 2nd. Visible angle  $I_a =$  non existent

In practice the visible angle is narrower as a reasonable amount of the number information has to come into view for the observer 130 to distinguish the numbers.

35

Using a viewer's head width of 180 mm, and viewing from 400 mm, the angle obscured by the viewer's

- 27 -

head would be ~ 25°, even though this is only ~75% of the calculated visible angle (~ 32°). In practice the numbers could not be discerned by a second viewer looking from behind just past the first viewer's head. Nevertheless if  
5 further security was sought the first viewer could move closer to less than 314 mm and completely fill the calculated viewing angle.

Examples of the present invention will now be  
10 described to further facilitate understanding of the invention. Example 1 and 2 illustrate the principle and a method of combining primary images into a secondary image in accordance with the first to third embodiments.

15 Example 1

Example 1 shows a secondary image in which four primary images consisting of a grid of individual image elements in the form A, B, C and D have been overlayed  
20 upon one another in such a manner that they do not overlap.

Figure 2 shows a mask which has a plurality of viewing portions 5 separated by image obscuring portions  
25 6. As shown in Figure 3, when the mask is properly located over the secondary image 1, all of the A elements are visible. Similarly, if the mask were to be displaced to the right by one pixel all of the B elements would be visible. Each viewing portion has identical dimensions,  
30 either in reality or in perspective (if a space is present between the mask and the secondary image) to the image elements in Figure 1.

Example 2

35

Figure 4 shows four original images. These images are prepared out of square elements having the same

- 28 -

size as the mask shown in Figure 2. The square elements do not have to be the same size as the mask elements however; for worthwhile interleaving to occur the images must be much larger than the elements of the mask.

5

These elements are manipulated by using an algorithm to make blank 3 out of every 4 pixels to form the primary images shown in Figure 5. As can be seen, for each pixel left undisturbed, one pixel has been made blank in the right-hand direction, one in the down direction, and one in the direction of one pixel space to the right and one pixel space down.

These primary images are then overlayed upon each other in such a manner that the image elements (i.e. the pixels) do not overlap as shown in Figure 6. It will be apparent in this Figure that the image 5(d) has been registered twice.

In Figure 7 the white background of the image in Figure 6 has been obscured by placing further elements to fill all of the white spaces. It will thus be apparent that each of the primary images is effectively obscured within the image. However, when the mask is overlayed there is sufficient legibility to allow the image to be perceived.

Persons skilled in the art will appreciate that various modifications can be made to the present invention without departing from the scope of the invention. For example, masks using shades or colours as shown in Figure 8 may be used in order to improve contrast to allow the images to be better perceived.

### 35 Example 3

Figure 9 illustrates how the anti-counterfeiting

- 29 -

properties of a security device are enhanced by producing a secondary image 50 and its mask 51 on opposite sides of a transparent substrate 52, such as a plastic film as shown in Figure 9. In this state, the thickness of the film,  $h$ , as well as the dimension of the image elements in the secondary image,  $r$ , both influence the extent of movement required in the observer from position 53 to position 54, in order to go from viewing one of the primary images in Figure 5(a)-(d) to the next. Thus, the characteristic rate of change between the primary images observable by the viewer in rotating the film depends upon its thickness and the dimension of the image elements in the secondary image and of the viewing portion in the mask.

15

The angle of vision subtended for a transition (i.e. the angle between positions 53 and 54) is defined by the equation:

$$20 \quad V_a = 2 \arcsin(R_i \sin(\arctan(r/2h)))$$

Where  $R_i$  is the refractive index of the spacer.

Hence if  $r = 20\mu\text{m}$ ,  $h = 90\mu\text{m}$ , and  $R_i = 1.57$ ,  
25  $V_a \approx 20^\circ$ . Hence at a viewing distance of 150 mm the observer must move their hand approximately 53 mm if the mask is held still.

In such a device, the counterfeiter would have to  
30 copy Figure 9 and its mask in their precise and exact original dimensions upon an identical plastic film of the precise thickness,  $20\mu\text{m}$ , to achieve the recognisably and characteristic switching of the primary images as observed in the original. These demands strongly protect the  
35 device from counterfeiting.

#### Example 4

- 30 -

Figure 16 illustrates how an animated effect may be achieved in a security device or apparatus in accordance with any one of the first to third embodiments.

5

Four images 20a - 20d in sequence form an animation of a running cat were selected.

Four screening masks 21a - 21d were prepared; these only differ in that they are offset by one pixel with respect to each other as a sequence starting from the first screen 21a; one pixel right 21b; one pixel down 21c and one pixel left 21d.

15 The four images 20a - 20d are screened by the masks such that where the screens pixels are black the image pixels become white. Thus each original image is reduced to an array of black pixels corresponding to the white pixels in the mask to thereby produce the encoded  
20 primary images 22a - 22d.

The four encoded primary images are combined such that if a black pixel occurs in a primary encoded image 21a - 21d it is black in the secondary image if it is  
25 white it is ignored.

The secondary image 23 can be animated by moving any one of the screening (decoding) masks over the top such that each primary image in the sequence becomes  
30 visible in order.

#### Example 5

The security device of the example shown in  
35 Figure 17 is made in accordance with the fourth embodiment and comprises an upper 30 and lower 31 decoding masks with a layer between containing the secondary image. The two

- 31 -

masks 30,32 are arranged to completely eclipse each other. In this way the device will appear opaque when viewed perpendicular to the surface of the security device. Producing a completely opaque security device can be  
5 important on card scanning devices that use light to detect the presence of the card. Thus, the security image cannot be observed from positions 33 or 34 but can be seen from position 35.

10               Persons skilled in the art will appreciate that various modifications can be made to the present invention without departing from the scope of the invention. These and other modifications will be apparent to those skilled in the art.

15

- 32 -

THE CLAIMS DEFINING THIS INVENTION ARE AS FOLLOWS:

1.           A security device comprising:  
            a secondary image comprising one or more encoded  
5   primary images, each of said one or more encoded primary  
     images comprising a plurality of regularly sized and  
     spaced apart primary image elements; and  
            a decoding mask separated from the secondary  
10   image, the decoding mask having a plurality of regularly  
     spaced apart transparent viewing portions separated by  
     masking portions, the size and spacing of the viewing  
     portions being such that when said viewing portions of the  
     mask, said secondary image and an observer are located in  
15   or more predetermined alignments for each said one or more  
     encoded primary images, the primary image elements from  
     the secondary image may be observed through the viewing  
     portions, whereby the corresponding primary image may be  
     observed along a line of sight corresponding to said  
20   predetermined alignment.
2.           A security device as claimed in claim 1 wherein  
     the secondary image comprises a plurality of encoded  
     primary images, the primary images being arranged such  
     that each of the primary images may be observed in  
25   different predetermined alignments of the mask, the  
     secondary image, and the observer.
3.           A security device as claimed in claim 2, wherein  
     each encoded primary image is arranged in at least partial  
30   overlapping relationship with at least one other primary  
     image with at least one primary image element located  
     within a boundary of the primary image.
4.           A security device as claimed in claim 2, wherein  
35   the encoded primary images are related and located  
     relative to one another so as to produce an animation  
     effect as successive primary images are observed.

- 33 -

5. A security device as claimed in claim 4, wherein the encoded primary images are related by encoding the same primary image so as to produce an animation effect of the primary image moving.

6. A security device as claimed in claim 4, wherein the encoded primary images are related by encoding similar primary images so as to produce an animation effect of parts of an image moving.

7. A security device as claimed in claim 1, where the area of each image element is in the range  $1 \times 10^{-14} \text{m}^2$  to  $4 \times 10^{-8} \text{m}^2$ .

8. A security device as claimed in claim 1, where the area of each image element is in the  $1 \times 10^{-12} \text{m}^2$  to  $2.5 \times 10^{-9} \text{m}^2$ .

9. A security device as claimed in claim 1, where the image elements are square and each side of the square has a length in the range of  $0.1 \mu\text{m}$  to  $200 \mu\text{m}$ .

10. A security device as claimed in claim 2, wherein the image elements are sized and spaced such that the secondary image comprises four encoded primary images.

11. A security device as claimed in claim 2, wherein there are N primary images and N-1 masking portions for each viewing portion.

12. A security device as claimed in claim 11, wherein the decoding mask comprises a plurality of evenly spaced, opaque vertical and horizontal lines which define therebetween the viewing portions, the lines providing the masking portions.

- 34 -

13. A security device as claimed in claim 12, wherein the vertical and horizontal lines are different, contrasting colours to one another.

5 14. A security device as claimed in claim 2, wherein the primary image elements of each encoded primary image are of a different colour to the primary image elements of each of the other encoded primary images.

10 15. A security device as claimed in claim 2, wherein the primary image elements are coloured and the colour and size of the primary image elements are chosen such that the secondary image has the appearance of a grey-scale image.

15 16. A security device as claimed in claim 2, wherein the secondary image has a boundary defining the set of image elements which provide the secondary image and within the boundary any image elements not provided by  
20 primary image elements are provided by additional obscuring image elements.

17. A security device as claimed in claim 16, wherein the additional obscuring image elements are randomly  
25 selected.

18. A security device as claimed in claim 1, wherein at least one of said secondary image and said decoding mask is printed within a transparent material to thereby  
30 prevent tampering.

19. A security device as claimed in claim 1, wherein both said secondary image and said decoding mask are printed within a transparent material to thereby prevent  
35 tampering.

20. A security device as claimed in claim 1, wherein

- 35 -

the colours of at least one of the decoding mask and/or at least one of said one or more primary images are chosen to enhance the effect of at least one of said one or more primary images coming into alignment.

5

21. A security device as claimed in claim 1, wherein the size of the image elements are chosen to vary such that the primary image elements appear to be the same size at a desired viewing distance.

10

22. A security device as claimed in claim 1, wherein said predetermined alignment is chosen such that each of the one or more primary images cannot be observed by an observer observing the security device along a line of sight substantially perpendicular to the plane in which the decoding mask is located.

15

23. A security device as claimed in claim 22, wherein there is only one primary image.

20

24. A security device as claimed in claim 22, wherein there are two different primary images which can be observed along lines of sight at different angles relative to the plane in which the secondary image is located.

25

25. A security device as claimed in claim 22, further comprising a blocking mask located on the opposite side of the secondary image to the decoding mask and separated from the secondary image by an additional separator.

30

26. A security device as claimed in claim 22, where the area of each image element is in the range  $1 \times 10^{-14} \text{m}^2$  to  $4 \times 10^{-8} \text{m}^2$ .

35

27. A security device as claimed in claim 22, where the area of each image element is in the range  $1 \times 10^{-12} \text{m}^2$  to  $2.5 \times 10^{-9} \text{m}^2$ .

- 36 -

28. A security device as claimed in claim 22, where the image elements are square and each side of the square has a length in the range of 0.1 $\mu$ m to 200 $\mu$ m.

5

29. A security device as claimed in claim 22, wherein the decoding mask comprises a plurality of evenly spaced opaque vertical lines which define therebetween the viewing portions, the lines providing the masking portions.

10

30. A security device as claimed in claim 22, wherein at least one of said secondary image and said decoding mask is printed within a transparent material to thereby prevent tampering.

15

31. A security device as claimed in claim 22, wherein both of said secondary image and said decoding mask are printed within a transparent material to thereby prevent tampering.

20

32. A security device as claimed in claim 22, wherein the spacing of the image elements is chosen such that a digital image acquirer cannot capture the secondary image.

25

33. A security device as claimed in claim 22, wherein the size of the image elements are chosen to vary so that the primary image elements appear to be the same size at a predetermined viewing distance.

30

34. A security device as claimed in claim 22, wherein at least some of the other image elements are transparent.

35. A security device as claimed in claim 24, wherein all the image elements not belonging to either of the primary images are transparent.

35

- 37 -

36. A security device as claimed in claim 1, wherein there is only one encoded primary image containing information of interest and wherein said decoding mask is positioned relative to said secondary image such that said  
5 primary image can only be observed by an observer observing the security device along a line of sight substantially perpendicular to the plane in which the decoding mask is located.
- 10 37. A security device as claimed in claim 36, further comprising a blocking mask located on the opposite side of the secondary image to the decoding mask and separated from the secondary image by an additional separator.
- 15 38. A security device as claimed in claim 36, where the area of each image element is in the range  $1 \times 10^{-14} \text{m}^2$  to  $4 \times 10^{-8} \text{m}^2$ .
- 20 39. A security device as claimed in claim 36, where the area of each image element is in the range  $1 \times 10^{-12} \text{m}^2$  to  $2.5 \times 10^{-9} \text{m}^2$ .
40. A security device as claimed in claim 36, where the image elements are square and each side of the square  
25 has a length in the range of  $0.1 \mu\text{m}$  to  $200 \mu\text{m}$ .
41. A security device as claimed in claim 36, wherein the decoding mask comprises a plurality of evenly spaced opaque vertical lines which define therebetween the  
30 viewing portions, the lines providing the masking portions.
42. A security device as claimed in claim 36, wherein at least one of said secondary image and said decoding  
35 mask is printed within a transparent material to thereby prevent tampering.

- 38 -

43. A security device as claimed in claim 36, wherein both of said secondary image and said decoding mask are printed within a transparent material to thereby prevent tampering.

5

44. A security device as claimed in claim 36, wherein the spacing of the image elements is chosen such that a digital image acquirer cannot capture the secondary image.

10 45. A security device as claimed in claim 36, wherein the size of the image elements is chosen to vary so that the primary image elements appear to be the same size at a predetermined viewing distance.

15 46. A security apparatus comprising:  
a security device adapted to be provided on or as part of an item to be secured, the security device comprising a secondary image comprising one or more encoded primary images, each of said one or more encoded  
20 primary images comprising a plurality of regularly sized and spaced apart primary image elements; and

a decoding mask having a plurality of regularly spaced apart viewing portions separated by masking portions, the size and spacing of the viewing portions  
25 being such that at a predetermined separation between the mask and the secondary image and when said viewing portions of the mask, said secondary image and an observer are in one or more predetermined alignments for each said one or more encoded primary images, the primary image  
30 elements of the aligned primary image of the secondary image may be observed through the viewing portions, whereby the corresponding primary image may be observed along a line of sight corresponding to said predetermined alignment.

35

47. A security apparatus as claimed in claim 46, wherein said security device comprises a plurality of

- 39 -

encoded primary images, the primary images being arranged such that each of the primary images may be observed in different predetermined alignments of the mask, the secondary image, and an observer.

5

48. Apparatus as claimed in claim 47, wherein each encoded primary image is arranged in at least partial overlapping relationship with at least one other primary image with one or more primary image elements located within a boundary of the at least the other primary image.

10

49. Apparatus as claimed in claim 47, wherein the encoded primary images are related so as to produce an animation effect as successive primary images are observed.

15

50. Apparatus as claimed in claim 49, wherein the encoded primary images are related by encoding the same primary image so as to produce an animation effect of the primary image moving.

20

51. Apparatus as claimed in claim 49, wherein the encoded primary images are related by encoding similar primary images so as to produce an animation effect of parts of the primary image moving.

25

52. Apparatus as claimed in claim 46, where the area of each image element is in the range  $1 \times 10^{-14} \text{m}^2$  to  $4 \times 10^{-8} \text{m}^2$ .

30

53. Apparatus as claimed in claim 46, where the area of each image element is in the range  $1 \times 10^{-12} \text{m}^2$  to  $2.5 \times 10^{-9} \text{m}^2$ .

35

54. Apparatus as claimed in claim 46, where the image elements are square and each side of the square has a length in the range of  $0.1 \mu\text{m}$  to  $100 \mu\text{m}$ .

- 40 -

55. Apparatus as claimed in claim 47, wherein the image elements are sized and spaced such that the secondary image comprises four encoded primary images.

5

56. Apparatus as claimed in claim 46, wherein the mask comprises a screen formed from a plurality of evenly spaced, opaque vertical and horizontal lines which define therebetween the viewing portions, the lines providing the masking portions

10

57. Apparatus as claimed in claim 56, wherein the vertical and horizontal lines are different colours to one another.

15

58. Apparatus as claimed in claim 57, wherein the different colours are chosen to be contrasting.

59. Apparatus as claimed in claim 47, wherein the image elements of each of said one or more primary images are of a different colour to the image elements of each of the other primary images.

20

60. Apparatus as claimed in claim 46, wherein the colours of each of said one or more primary images are chosen such that the secondary image has the appearance of a grey-scale image until the decoding mask, the observer and secondary image are in one of said one or more predetermined alignments.

25

30

61. Apparatus as claimed in claim 46, wherein the secondary image has a boundary defining the set of image elements which provide the secondary image and within that boundary any image elements not provided by image elements of the encoded primary images are provided by additional obscuring image elements.

35

- 41 -

62. Apparatus as claimed in claim 61, wherein the additional obscuring image elements are randomly selected.

63. Apparatus as claimed in claim 46, further comprising a transparent separator having a thickness corresponding to said predetermined separation.

64. Apparatus as claimed in claim 46, wherein at least one of said security device and said decoding mask is formed on said separator.

65. Apparatus as claimed in claim 46, wherein at least one of said security device and said decoding mask is printed within a transparent material to thereby prevent tampering.

66. Apparatus as claimed in claim 46, wherein both said security device and said decoding mask are printed within a transparent material to thereby prevent tampering.

67. Apparatus as claimed in claim 46, wherein the decoding mask and secondary image are provided at spaced apart locations on the same piece of material in such a manner that the material can be folded so as to locate the decoding mask over the secondary image and move the decoding mask relative to the secondary image to view each of the primary images.

68. A method of securing an item comprising:  
providing a security device adapted to be provided on or as part of an item to be secured, the security device comprising a secondary image comprising one or more encoded primary images, each of said one or more encoded primary images comprising a plurality of regularly sized and spaced apart primary image elements;  
providing a decoding mask having a plurality of

- 42 -

regularly spaced apart viewing portions separated by masking portions, the size and spacing of the viewing portions being such that at a predetermined separation between the mask and the secondary image and when said  
5 viewing portions of the mask, said secondary image and an observer are in one or more predetermined alignments for each said one or more encoded primary images, the primary image elements of the aligned primary image of the secondary image may be observed through the viewing  
10 portions, whereby the corresponding primary image may be observed along a line of sight corresponding to said predetermined alignment.

69. A method of securing an item as claimed in claim  
15 68, wherein said security device comprises a plurality of encoded primary images, and method involves arranging the primary images such that each of the primary images may be observed in different predetermined alignments of the mask, the secondary image, and an observer.

20 70. A method of securing an item as claimed in claim 69, further comprising arranging each encoded primary image in at least partial overlapping relationship with at least one other primary image with one or more primary  
25 image elements located within a boundary of the at least the other primary image.

71. A method of securing an item as claimed in claim  
30 70, further comprising relating the encoded primary images so as to produce an animation effect as successive primary images are observed.

72. A method as claimed in claim 71, wherein the  
35 encoded primary images are related by encoding the same primary image so as to produce an animation effect of the primary image moving.

- 43 -

73. A method as claimed in claim 71, wherein the encoded primary images are related by encoding similar primary images so as to produce an animation effect of parts of the primary image moving.
- 5 74. A method as claimed in claim 69, comprising providing four encoded primary images.
75. Apparatus as claimed in claim 46, comprising  
10 providing a screen formed from a plurality of evenly spaced, opaque vertical and horizontal lines which define therebetween the viewing portions, the lines providing the masking portions
- 15 76. A method as claimed in claim 75, wherein the vertical and horizontal lines are different colours to one another.
77. A method as claimed in claim 76, wherein the  
20 different colours are chosen to be contrasting.
78. A method as claimed in claim 68, comprising selecting the colours of each of said one or more primary images such that the secondary image has the appearance of  
25 a grey-scale image until the decoding mask, the observer and secondary image are in one of said one or more predetermined alignments.
79. A method as claimed in claim 68, further  
30 comprises providing a transparent separator having a thickness corresponding to said predetermined separation.
80. A method as claimed in claim 79, comprising providing at least one of said security device and said  
35 decoding mask is formed on said separator.
81. A method as claimed in claim 79, comprising

- 44 -

providing at least one of said security device and said decoding mask by printing it within a transparent material to thereby prevent tampering.

- 5 82. A device as claimed in claim 1, wherein portions of said secondary image are separated from said decoding mask by different predetermined distances.

- 1/9 -

A	B	A	B	A	B	A	B	A
D	C	D	C	D	C	D	C	D
A	B	A	B	A	B	A	B	A
D	C	D	C	D	C	D	C	D
A	B	A	B	A	B	A	B	A
D	C	D	C	D	C	D	C	D
A	B	A	B	A	B	A	B	A
D	C	D	C	D	C	D	C	D
A	B	A	B	A	B	A	B	A

Fig 1

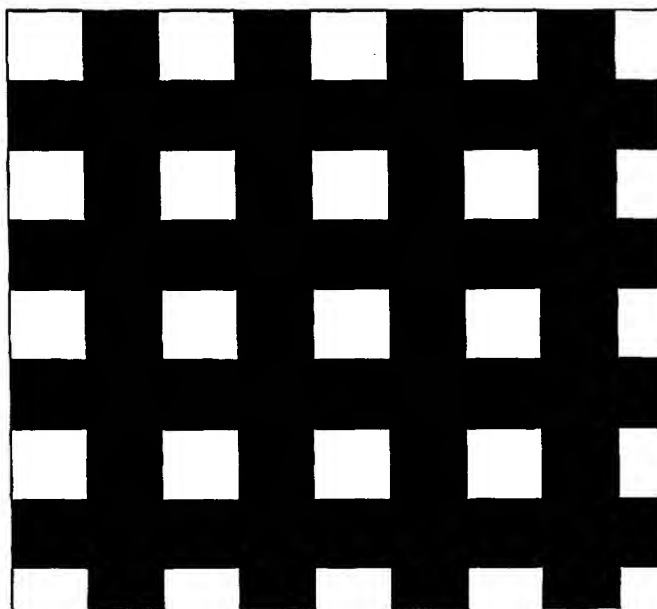


Fig 2

- 2/9 -

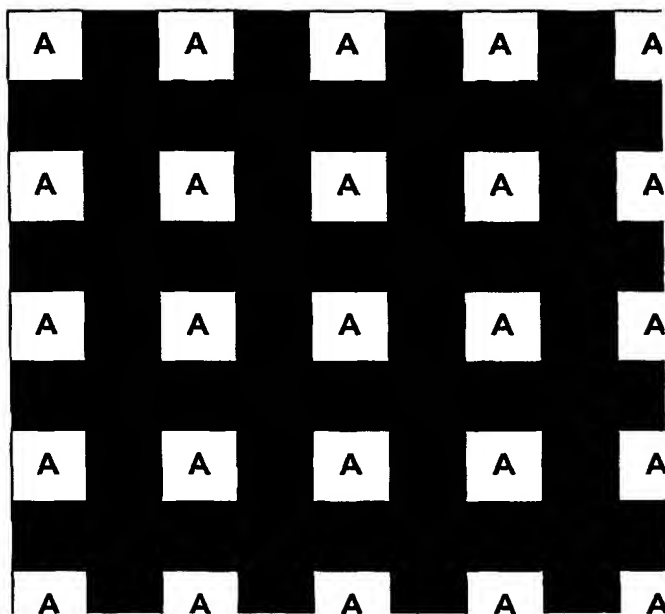


Fig 3

CSIRO

(a)

LDM<sup>c</sup>

(b)

NPA

(c)

MS

(d)

Fig 4

- 3/9 -

C S I R O

(a)

L D M \*

(b)

M P A

(c)

M S

(d)

Fig 5

1234567890

Fig 6

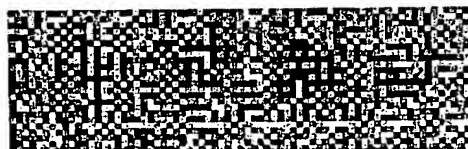


Fig 7




Fig 8

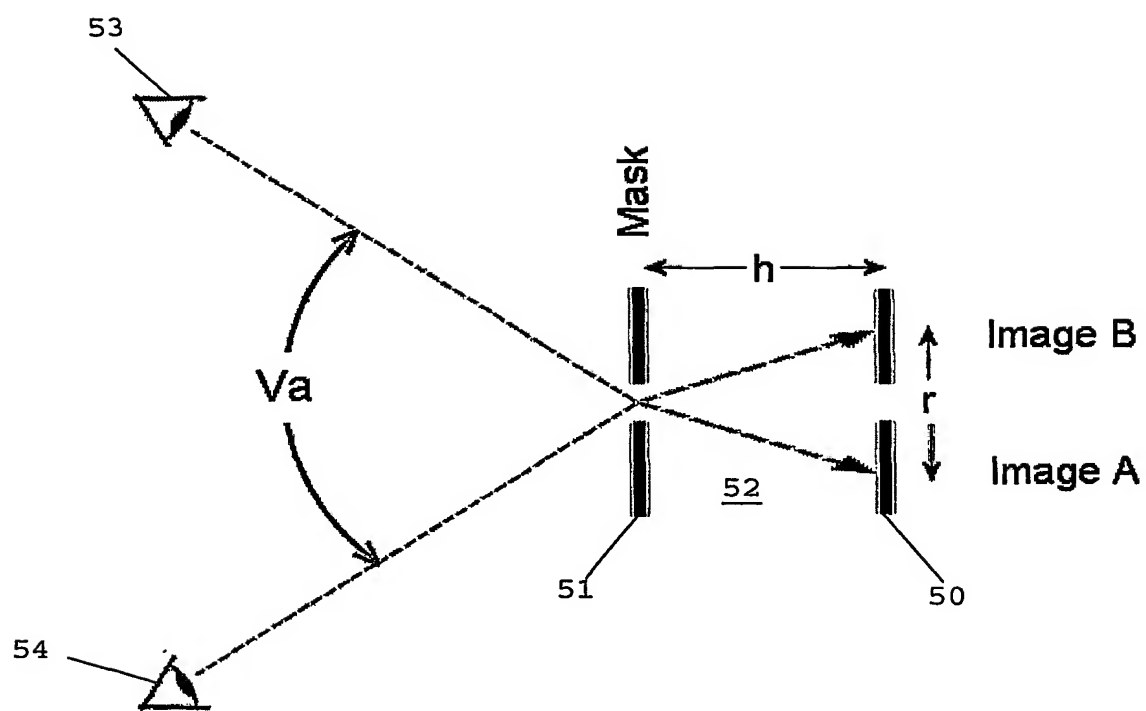


Fig 9

- 5/9 -

1 7 2 9 4  
9 5 6 1 7 8  
0 3 5 3 2  
6 0 6 4 8

Fig 10

1 7 2 9 4  
9 5 6 1 7 8  
0 3 5 3 2  
6 0 6 4 8

Fig 11

- 6/9 -

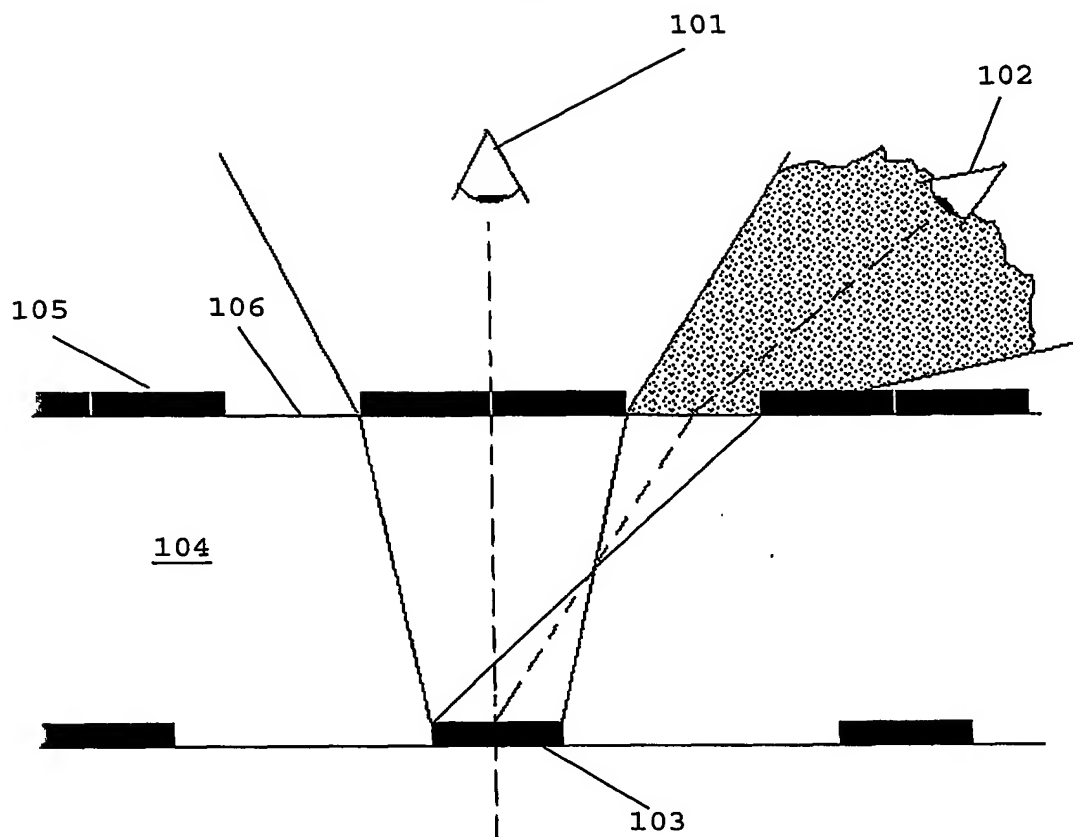


Fig 12

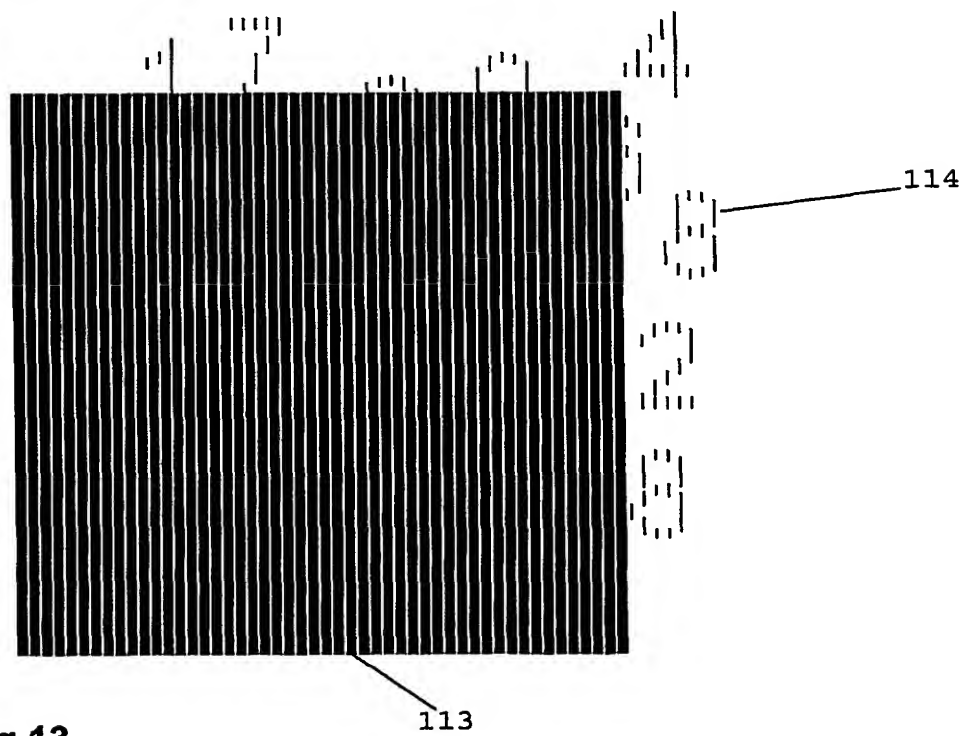
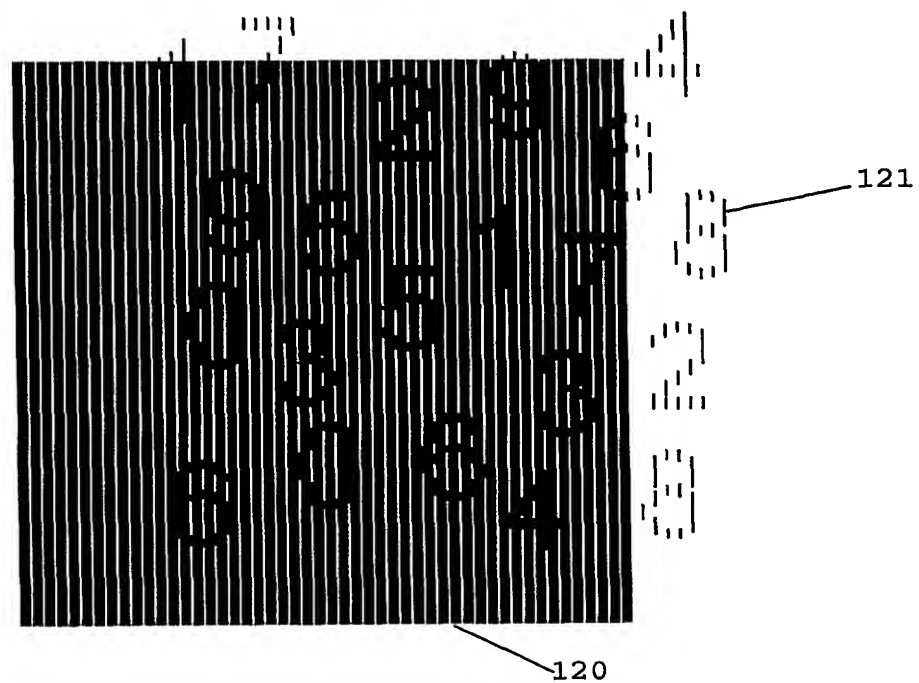
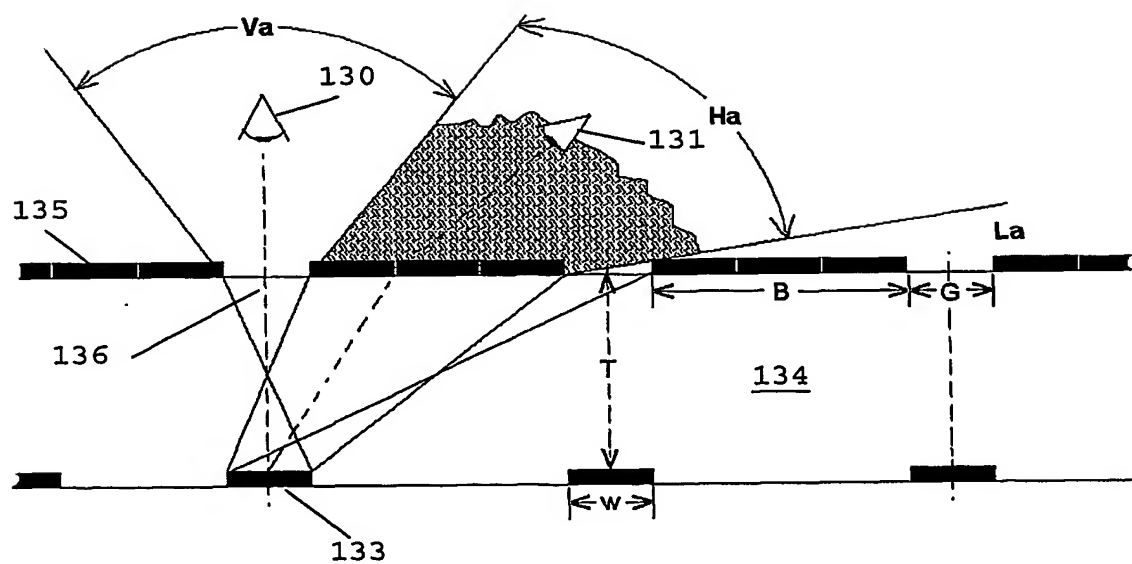


Fig 13



**Fig 14**



**Fig 15**

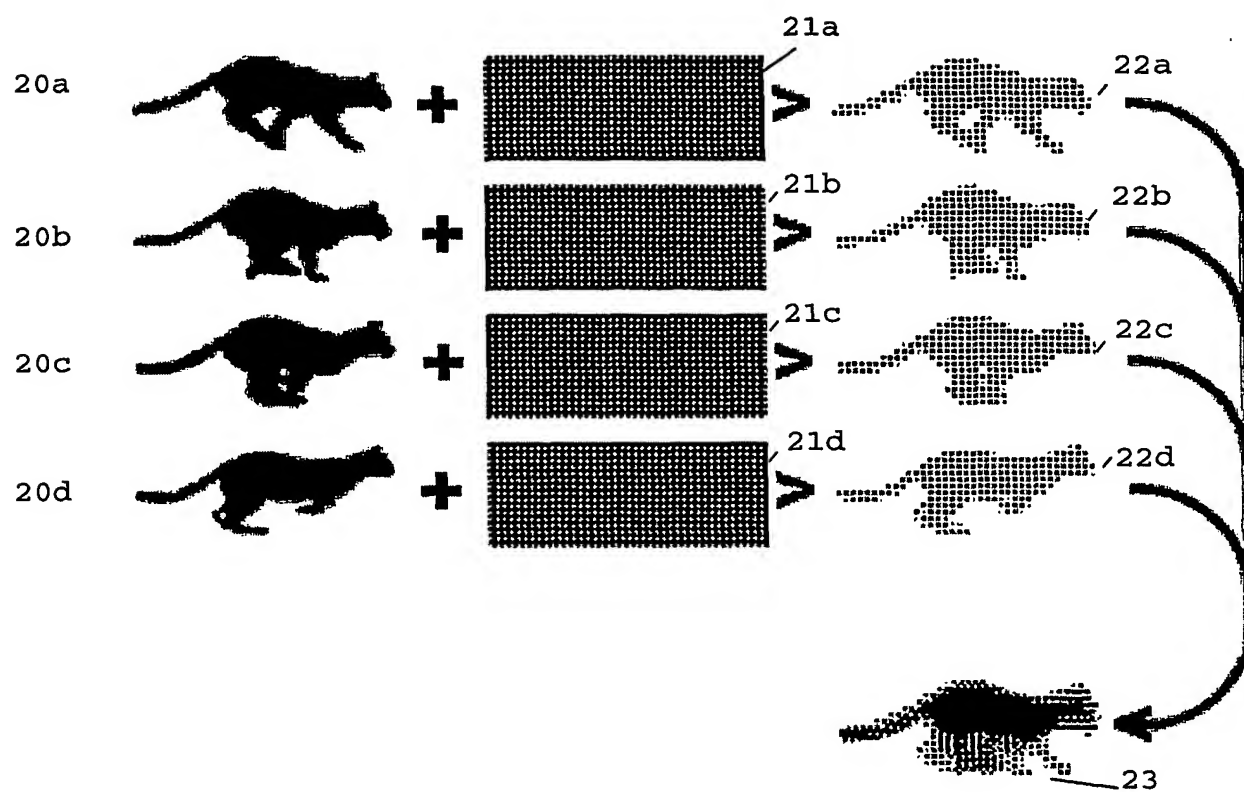


Fig 16

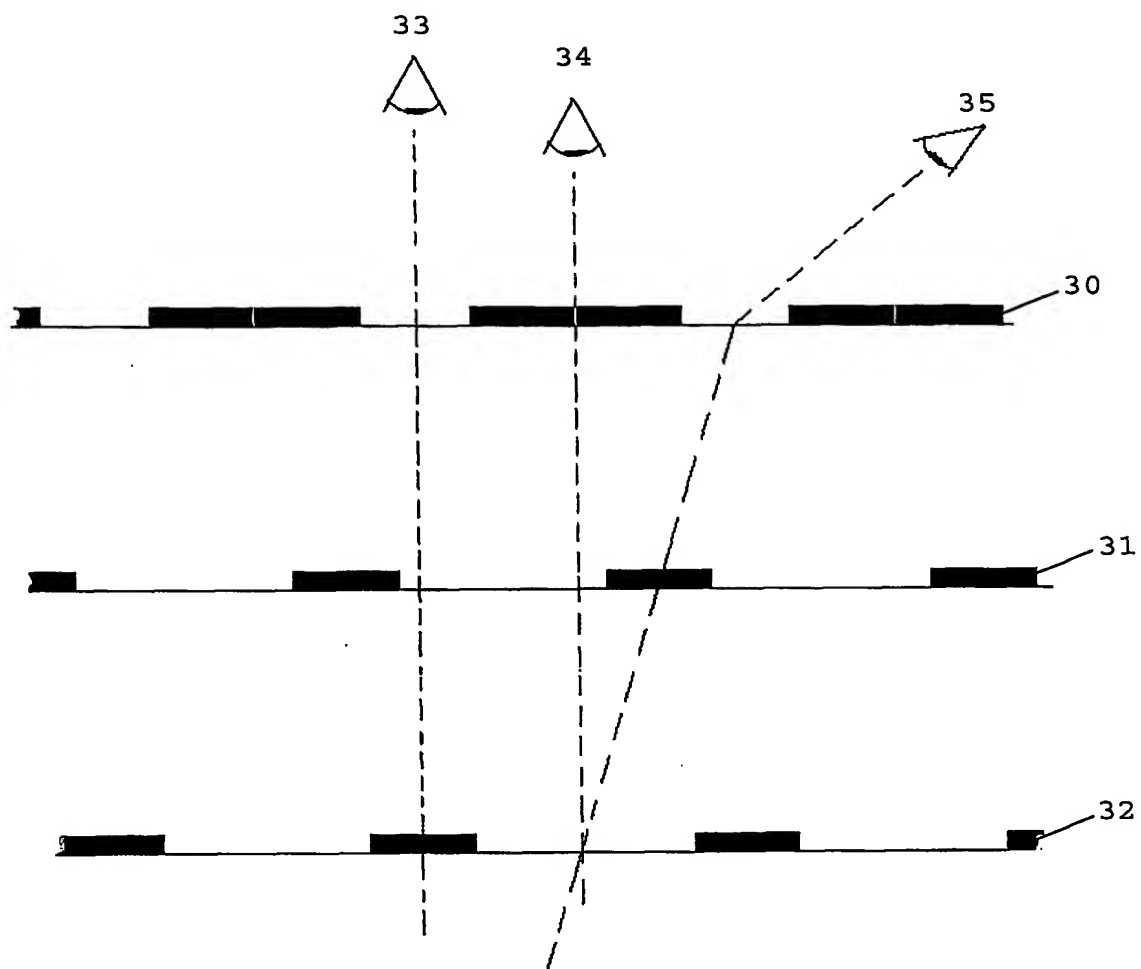


Fig 17

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU03/01331

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>												
Int. Cl. <sup>7</sup> : G06K 9/74, G07D 7/00, B42D 15/10, B44F 1/00												
According to International Patent Classification (IPC) or to both national classification and IPC												
<b>B. FIELDS SEARCHED</b>												
Minimum documentation searched (classification system followed by classification symbols)												
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched												
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DWPI, JAPIO IPC G07D 7/IC, B42D 15/10, G06K 5/IC G06K 9/IC, B44F/IC, B44D/IC with KEYWORDS : securit+ or counterfeit+ or forger+ or fake? or replica? or copies or copy; encod+; decod+ or de cod+. Second Search , Whole . database DWPI, JAPIO with KEYWORDS : securit+ etc; encod+; (decod+ mask?).												
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>												
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.										
A	US 2002/0041712 A (ROUSTAEI et al.) 11 April 2002											
A	WO 02/15133 A (GEMPLUS) 21 February 2002											
A	WO 00/07356 A (DIGIMARC CORPORATION) 10 February 2000											
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex												
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E" earlier application or patent but published on or after the international filing date</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td>"&amp;" document member of the same patent family</td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	"P" document published prior to the international filing date but later than the priority date claimed	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention											
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone											
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art											
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family											
"P" document published prior to the international filing date but later than the priority date claimed												
Date of the actual completion of the international search 7 November 2003		Date of mailing of the international search report 18 NOV 2003										
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaaustralia.gov.au Facsimile No. (02) 6285 3929		Authorized officer  <b>LARS KOCH</b> Telephone No : (02) 6283 2551										

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU03/01331

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	Patent Abstracts of Japan, JP 09-009071 A (MINOLTA CO LTD) 10 January 1997	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU03/01331

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report			Patent Family Member		
US	20020041712	NONE			
WO	0215133	AU	79918/01	FR	2812959
WO	0007356	AU	11022/01	AU	22965/02
		AU	35629/99	AU	36678/02
		AU	48513/00	AU	59652/01
		AU	73184/01	AU	83073/01
		CA	2218957	CA	2326565
		CA	2373511	EP	0737387
		EP	0959620	EP	0959621
		EP	0981113	EP	0987855
		EP	1019868	EP	1049320
		EP	1137251	EP	1185967
		GB	2375254	HK	1030122
		US	5745604	US	5748763
		US	5822436	US	5832119
		US	5841978	US	5850481
		US	6026193	US	6064737
		US	6122392	US	6122403
		US	6266430	US	6278781
		US	6289108	US	6307949
		US	6324573	US	6330335
		US	6345104	US	6353672
		US	6381341	US	6400827
		US	6408082	US	6424725
		US	6438231	US	6449377
		US	6496591	US	6505160
		US	6535618	US	6539095
		US	6542620	US	6546112
		US	6560349	US	6567533
		US	6574350	US	6580819
		US	6611607	US	6614914
		US	2001010730	US	2001012377
				AU	30086/97
				AU	48367/99
				AU	60223/96
				CA	2174413
				CA	2338618
				EP	0824821
				EP	0961239
				EP	1003324
				EP	1054335
				GB	2353168
				HK	1031013
				US	5768426
				US	5841886
				US	5862260
				US	6111954
				US	6252963
				US	6285776
				US	6311214
				US	6343138
				US	6363159
				US	6404898
				US	6427020
				US	6449379
				US	6522770
				US	6542618
				US	6553129
				US	6567534
				US	6587821
				US	2001005423
				US	2001016051

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU03/01331

US	2001017931	US	2001019618	US	2001022848
US	2001031065	US	2001032251	US	2001053236
US	2001055407	US	2002001396	US	2002006212
US	2002009208	US	2002016816	US	2002018572
US	2002018579	US	2002021825	US	2002028000
US	2002029253	US	2002032864	US	2002034297
US	2002048387	US	2002061120	US	2002062382
US	2002067844	US	2002076081	US	2002080993
US	2002080995	US	2002080996	US	2002080997
US	2002085718	US	2002090112	US	2002090113
US	2002112165	US	2002114492	US	2002118831
US	2002120849	US	2002126873	US	2002131076
US	2002136429	US	2002136430	US	2002145759
US	2002159615	US	2002164049	US	2002164050
US	2002164051	US	2002164052	US	2002164053
US	2002168085	US	2002170966	US	2002172397
US	2002176600	US	2002176601	US	2002181735
US	2002181736	US	2002181737	US	2002186863
US	2002186886	US	2002186887	US	2002188841
US	2003002710	US	2003012403	US	2003021440
US	2003021441	US	2003025423	US	2003026451
US	2003026452	US	2003031340	US	2003031341
US	2003033530	US	2003035565	US	2003037075
US	2003039377	US	2003040326	US	2003040957
US	2003050961	US	2003053653	US	2003053654
US	2003056104	US	2003086585	US	2003091189
US	2003102660	US	2003103645	US	2003105730
US	2003112998	US	2003118210	US	2003128861
US	2003128862	US	2003130954	US	2003133592
US	2003142847	US	2003150922	US	2003167173
US	2003167235	US	2003174860	US	2003174861
US	2003174863	US	2003179903	US	2003187798
WO	0070585	WO	0135323	WO	0186579
WO	0207067	WO	0211056	WO	0213094
WO	0239235	WO	9514289	WO	9636163
WO	9743736	WO	9953428	WO	03019449
ZA	200100615				

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU03/01331

JP	09009071	NONE
----	----------	------

END OF ANNEX

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 April 2004 (22.04.2004)

PCT

(10) International Publication Number  
**WO 2004/034313 A1**

(51) International Patent Classification<sup>7</sup>: **G06K 9/74**,  
G07D 7/00, B42D 15/10, B44F 1/00

Vic 3174 (AU). **SWIEGERS, Gerhard** [AU/AU]; 53  
Petronella Avenue, Wheeler's Hill, VIC 3150 (AU).

(21) International Application Number:  
PCT/AU2003/001331

(74) Agent: **GRIFFITH HACK**; Level 3, 509 St Kilda Road,  
Melbourne, VIC 3004 (AU).

(22) International Filing Date: 9 October 2003 (09.10.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2002951963 9 October 2002 (09.10.2002) AU

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **COM-  
MONWEALTH SCIENTIFIC AND INDUSTRIAL  
RESEARCH ORGANISATION** [AU/AU]; Limestone  
Avenue, Campbell, ACT 2612 (AU).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **MCCARTHY**,  
Lawrence [AU/AU]; 13 Wren Drive, Noble Park North,

Published:

— with international search report

[Continued on next page]

(54) Title: SECURITY DEVICE

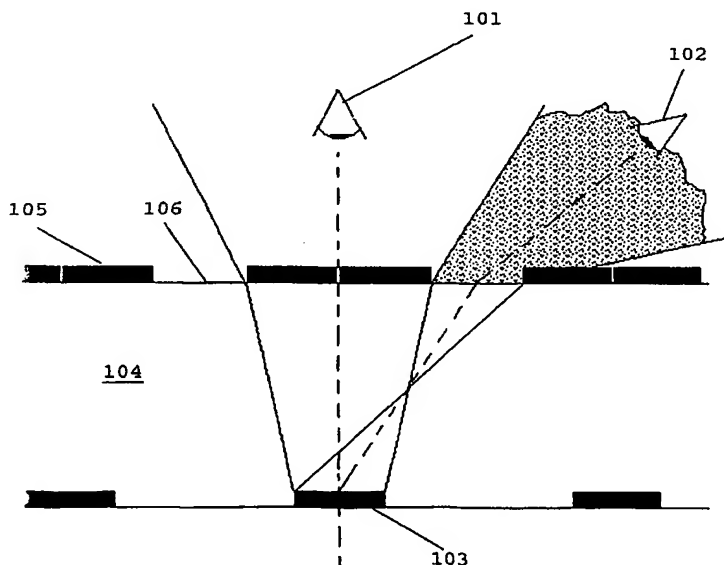

(57) Abstract: The present invention relates to a security device or a security apparatus comprising one or more primary images (103) encoded within a secondary image in such a manner that the primary images can only be observed by an observer (102) when the secondary image, a decoding mask (105) and the observer are in a predetermined alignment. Embodiments of the invention have application in the provision of security devices which can be used to verify the legitimacy of a document, instrument or the like.

WO 2004/034313 A1

**WO 2004/034313 A1**



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU03/01331

**A. CLASSIFICATION OF SUBJECT MATTER**Int. Cl. <sup>7</sup>: G06K 9/74, G07D 7/00, B42D 15/10, B44F 1/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DWPI, JAPIO IPC G07D 7/IC, B42D 15/10, G06K 5/IC G06K 9/IC, B44F/IC, B44D/IC with KEYWORDS : securit+ or counterfeit+ or forger+ or fake? or replica? or copies or copy; encod+; decod+ or de cod+. Second Search , Whole . database DWPI, JAPIO with KEYWORDS : securit+ etc; encod+; (decod+ mask?).

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/0041712 A (ROUSTAEI et al.) 11 April 2002	
A	WO 02/15133 A (GEMPLUS) 21 February 2002	
A	WO 00/07356 A (DIGIMARC CORPORATION) 10 February 2000	



Further documents are listed in the continuation of Box C



See patent family annex

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search  
7 November 2003

Date of mailing of the international search report

18 NOV 2003

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE  
PO BOX 200, WODEN ACT 2606, AUSTRALIA  
E-mail address: pct@ipaustalia.gov.au  
Facsimile No. (02) 6285 3929

Authorized officer

LARS KOCH

Telephone No : (02) 6283 2551

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU03/01331

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	Patent Abstracts of Japan, JP 09-009071 A (MINOLTA CO LTD) 10 January 1997	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU03/01331

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report			Patent Family Member			
US	20020041712	NONE				
WO	0215133	AU	79918/01	FR	2812959	
WO	0007356	AU	11022/01	AU	22965/02	AU 30086/97
		AU	35629/99	AU	36678/02	AU 48367/99
		AU	48513/00	AU	59652/01	AU 60223/96
		AU	73184/01	AU	83073/01	CA 2174413
		CA	2218957	CA	2326565	CA 2338618
		CA	2373511	EP	0737387	EP 0824821
		EP	0959620	EP	0959621	EP 0961239
		EP	0981113	EP	0987855	EP 1003324
		EP	1019868	EP	1049320	EP 1054335
		EP	1137251	EP	1185967	GB 2353168
		GB	2375254	HK	1030122	HK 1031013
		US	5745604	US	5748763	US 5768426
		US	5822436	US	5832119	US 5841886
		US	5841978	US	5850481	US 5862260
		US	6026193	US	6064737	US 6111954
		US	6122392	US	6122403	US 6252963
		US	6266430	US	6278781	US 6285776
		US	6289108	US	6307949	US 6311214
		US	6324573	US	6330335	US 6343138
		US	6345104	US	6353672	US 6363159
		US	6381341	US	6400827	US 6404898
		US	6408082	US	6424725	US 6427020
		US	6438231	US	6449377	US 6449379
		US	6496591	US	6505160	US 6522770
		US	6535618	US	6539095	US 6542618
		US	6542620	US	6546112	US 6553129
		US	6560349	US	6567533	US 6567534
		US	6574350	US	6580819	US 6587821
		US	6611607	US	6614914	US 2001005423
		US	2001010730	US	2001012377	US 2001016051

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU03/01331

US	2001017931	US	2001019618	US	2001022848
US	2001031065	US	2001032251	US	2001053236
US	2001055407	US	2002001396	US	2002006212
US	2002009208	US	2002016816	US	2002018572
US	2002018579	US	2002021825	US	2002028000
US	2002029253	US	2002032864	US	2002034297
US	2002048387	US	2002061120	US	2002062382
US	2002067844	US	2002076081	US	2002080993
US	2002080995	US	2002080996	US	2002080997
US	2002085718	US	2002090112	US	2002090113
US	2002112165	US	2002114492	US	2002118831
US	2002120849	US	2002126873	US	2002131076
US	2002136429	US	2002136430	US	2002145759
US	2002159615	US	2002164049	US	2002164050
US	2002164051	US	2002164052	US	2002164053
US	2002168085	US	2002170966	US	2002172397
US	2002176600	US	2002176601	US	2002181735
US	2002181736	US	2002181737	US	2002186863
US	2002186886	US	2002186887	US	2002188841
US	2003002710	US	2003012403	US	2003021440
US	2003021441	US	2003025423	US	2003026451
US	2003026452	US	2003031340	US	2003031341
US	2003033530	US	2003035565	US	2003037075
US	2003039377	US	2003040326	US	2003040957
US	2003050961	US	2003053653	US	2003053654
US	2003056104	US	2003086585	US	2003091189
US	2003102660	US	2003103645	US	2003105730
US	2003112998	US	2003118210	US	2003128861
US	2003128862	US	2003130954	US	2003133592
US	2003142847	US	2003150922	US	2003167173
US	2003167235	US	2003174860	US	2003174861
US	2003174863	US	2003179903	US	2003187798
WO	0070585	WO	0135323	WO	0186579
WO	0207067	WO	0211056	WO	0213094
WO	0239235	WO	9514289	WO	9636163
WO	9743736	WO	9953428	WO	03019449
ZA	200100615				

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/AU03/01331

JP	09009071	NONE
----	----------	------

END OF ANNEX

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**